



daytonaudio.com
tel + 937.743.8248
info@daytonaudio.com

705 Pleasant Valley Dr.
Springboro, OH 45066
USA




WARNING: This product may contain a chemicals known to the State of California to cause cancer or birth defects or other reproductive harm.

5-Year Limited Warranty
See daytonaudio.com for details



FOUR 4" DRIVER LOW-PROFILE PASSIVE SUBWOOFER

Model: MKSX4 User Manual

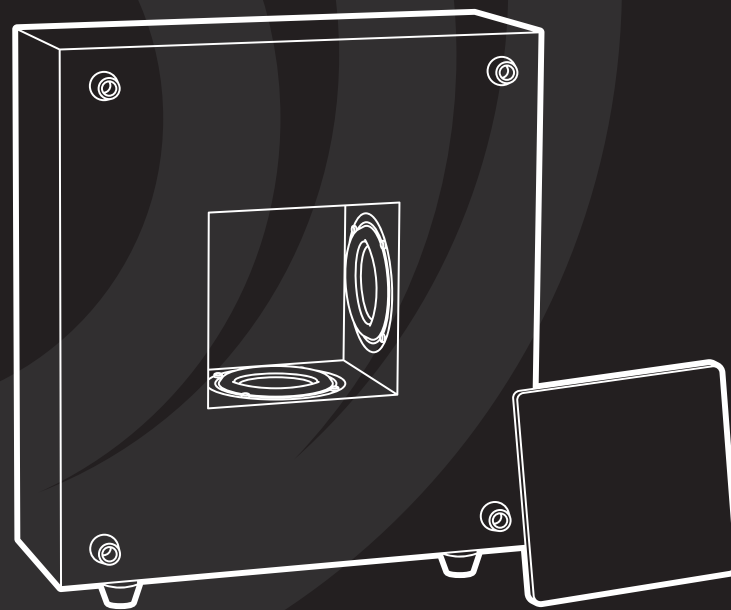

Thank you for purchasing the Dayton Audio® MKSX4 4x4" Low-Profile Subwoofer. The unique design and various orientation options make it a perfect addition to any stereo, home theater or 2.1 audio system.

Room placement

This subwoofer's low-profile down or side firing orientation gives you many options for placement. Use two or more subwoofers to maximize the low frequency effects from your favorite programs. Mounting the subwoofers closer to the corners (aka: corner loading) will provide even more bass from this specially designed subwoofer. Placing the subwoofer under furniture, behind cabinetry, or even behind seating will result in no adverse effects to the sound quality.

DOWN FIRING – Under cabinet, under couch, on top of armoire, or on the entertainment center as a TV stand are all possible. Four threaded rubber feet are included for down-firing installations to elevate the subwoofer and protect the surfaces. If coupling to the floor is desired, Dayton Audio speaker spikes can be used instead (sold separately).

SIDE-FIRING – Simply move the threaded rubber feet to match your desired orientation and slide it behind a chair, armoire, table or couch.


What's in the box

- 1 - 4 x 4" Universal Low-Profile Subwoofer
- 4 threaded rubber feet

Speaker Connection

4 ohm single-channel operation:

Just connect the Red(+) and Black(-) terminals to the corresponding output of the amplifier.

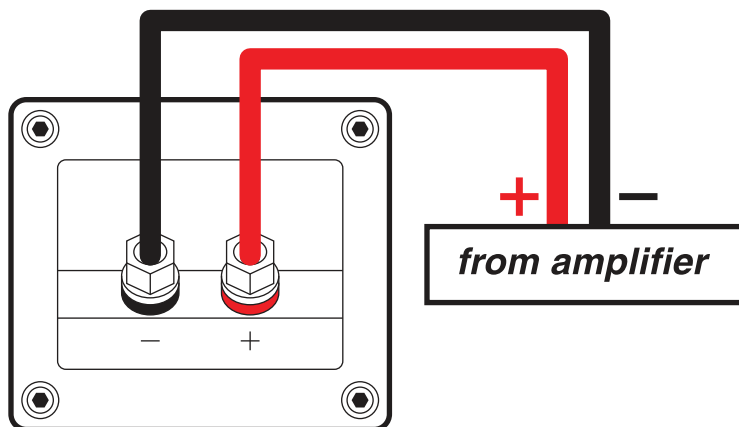

Powering the MKSX4 subwoofer

For best results, the MKSX4 should be used with a dedicated subwoofer amplifier. Please visit daytonaudio.com to see our full line of subwoofer amplifiers.

Specifications

Description:	Four Driver Manifold-Mounted Low-Profile Passive Subwoofer
Woofers:	4 x 4" high excursion
Enclosure type:	Vented, manifold mounted, low-profile
Finish:	Black textured vinyl
Power handling:	160 watts RMS, 320 watts max
Impedance:	4 ohms
Response:	40-500 Hz
Sensitivity:	88 dB 1W/1m
Terminals:	5-way binding posts
Dimensions:	W 5.9" X L 14" X H 16" Depth includes grill*

* Grill is removable, acoustically-transparent cloth