



GW-15PC/4


Transducer Evaluation

2/12/03

Device Under Test: Goldwood 15PC-4 15" driver

Object of Test: Response, sensitivity and impedance

Conditions of test: Axial, 1/2 space, MIC @ 1M, 2.83Vrms pink weighted MLS

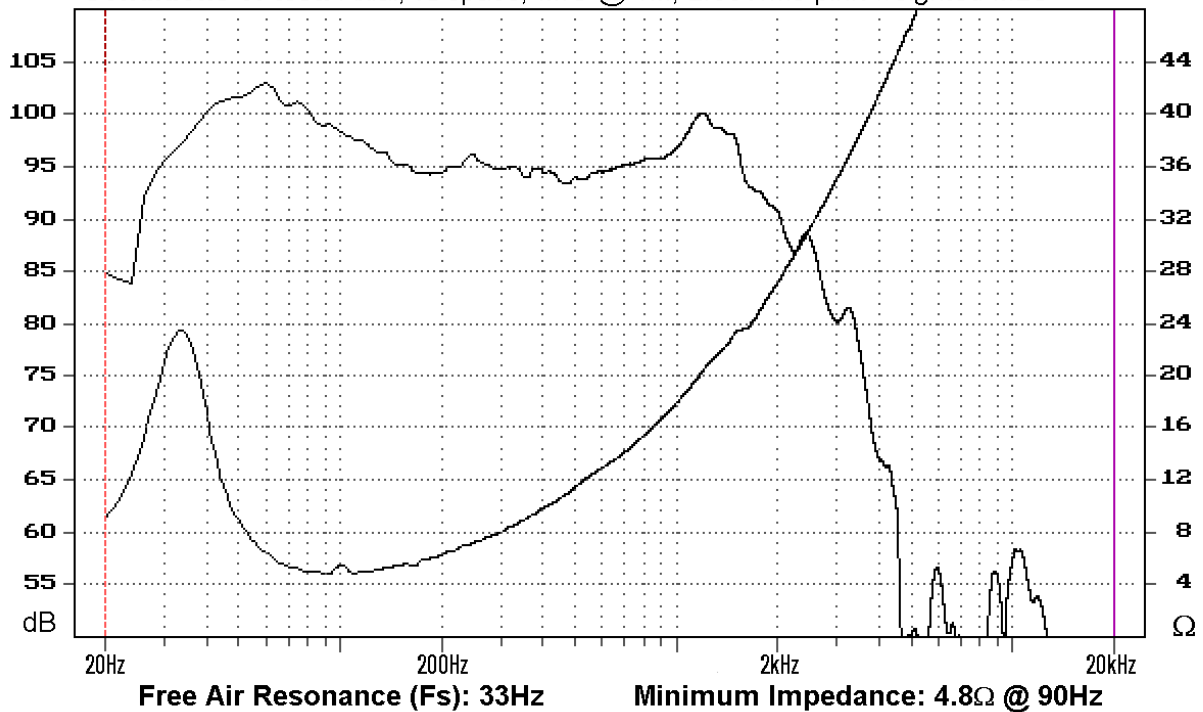

Response resolution: 2Hz, smoothing: 0.05 octave
Impedance resolution: 1Hz, smoothing: 0.01 octave
Enclosure volume: 283L