




GW-5028S

Transducer Evaluation

File: C:\MLS\GOLDWOOD\RESP-51.FRQ 4-5-2002 3:59 PM (equalized)
Sensitivity Mag - dB SPL/watt (8 ohms, @1.00 meters) (0.15 oct)

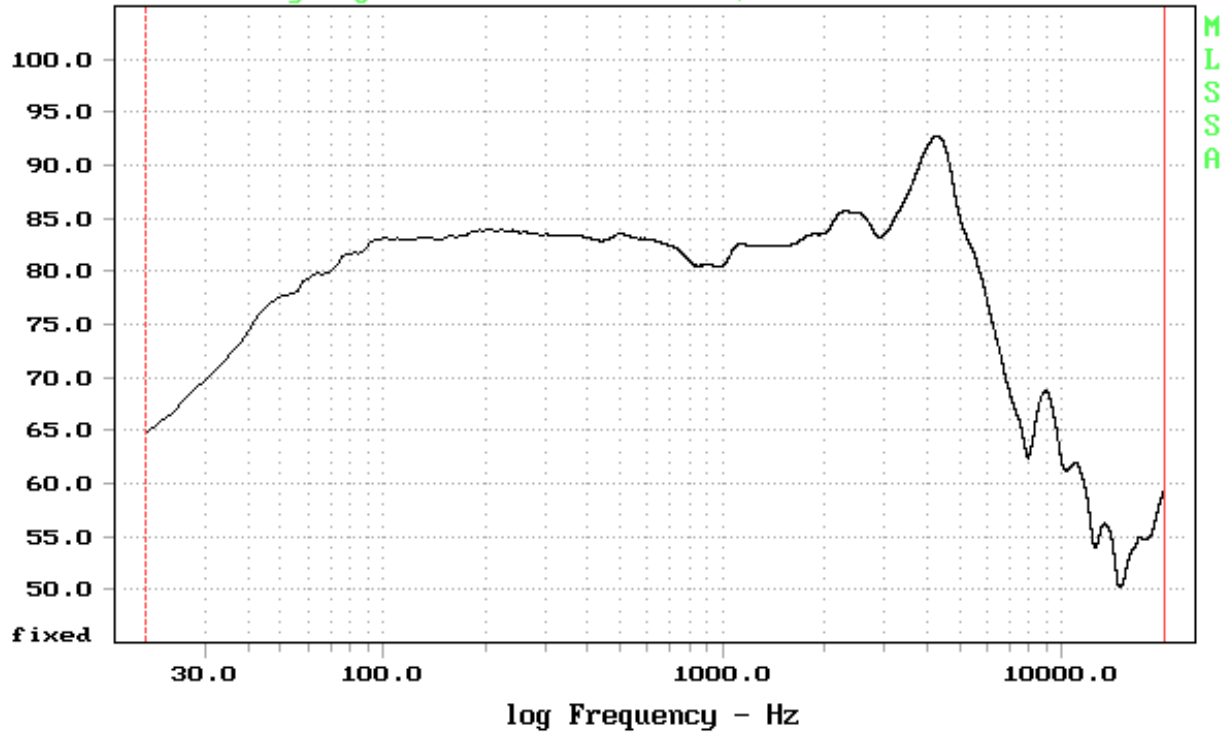

CURSOR: y = 59.5405 x = 19999.5192 (9994)
