


## PARAMETERS

Impedance	4 ohms
Re	3.3 ohms
Le	0.51 mH @ 1 kHz
Fs	37.7 Hz
Qms	1.85
Qes	0.48
Qts	0.38
Mms	25.0g
Cms	0.71 mm/N
Sd	213.8 cm <sup>2</sup>
Vd	128.2 cm <sup>3</sup>
BL	6.4 Tm
Vas	45.8 liters
Xmax	6 mm
VC Diameter	38.5 mm
SPL	92.9 dB @ 2.83V/1m
RMS Power Handling	80 watts
Usable Frequency Range (Hz)	35 - 5,500 Hz


## FEATURES

- Three-part paper composite diaphragm featuring paper, Kevlar, and glass fibers
- Low-distortion motor, 6-hole cast frame, rubber surround, and solid aluminum phase plug
- Perfect for use as a woofer, midwoofer, or dedicated midrange driver
- 92.9 dB sensitivity and 6 mm of excursion

## IMPEDANCE/PHASE

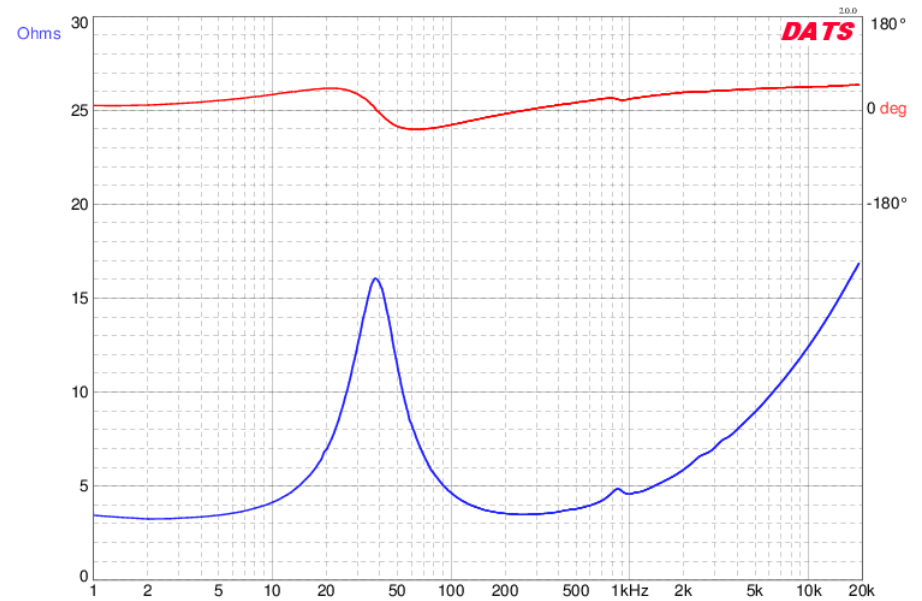

## FREQUENCY RESPONSE

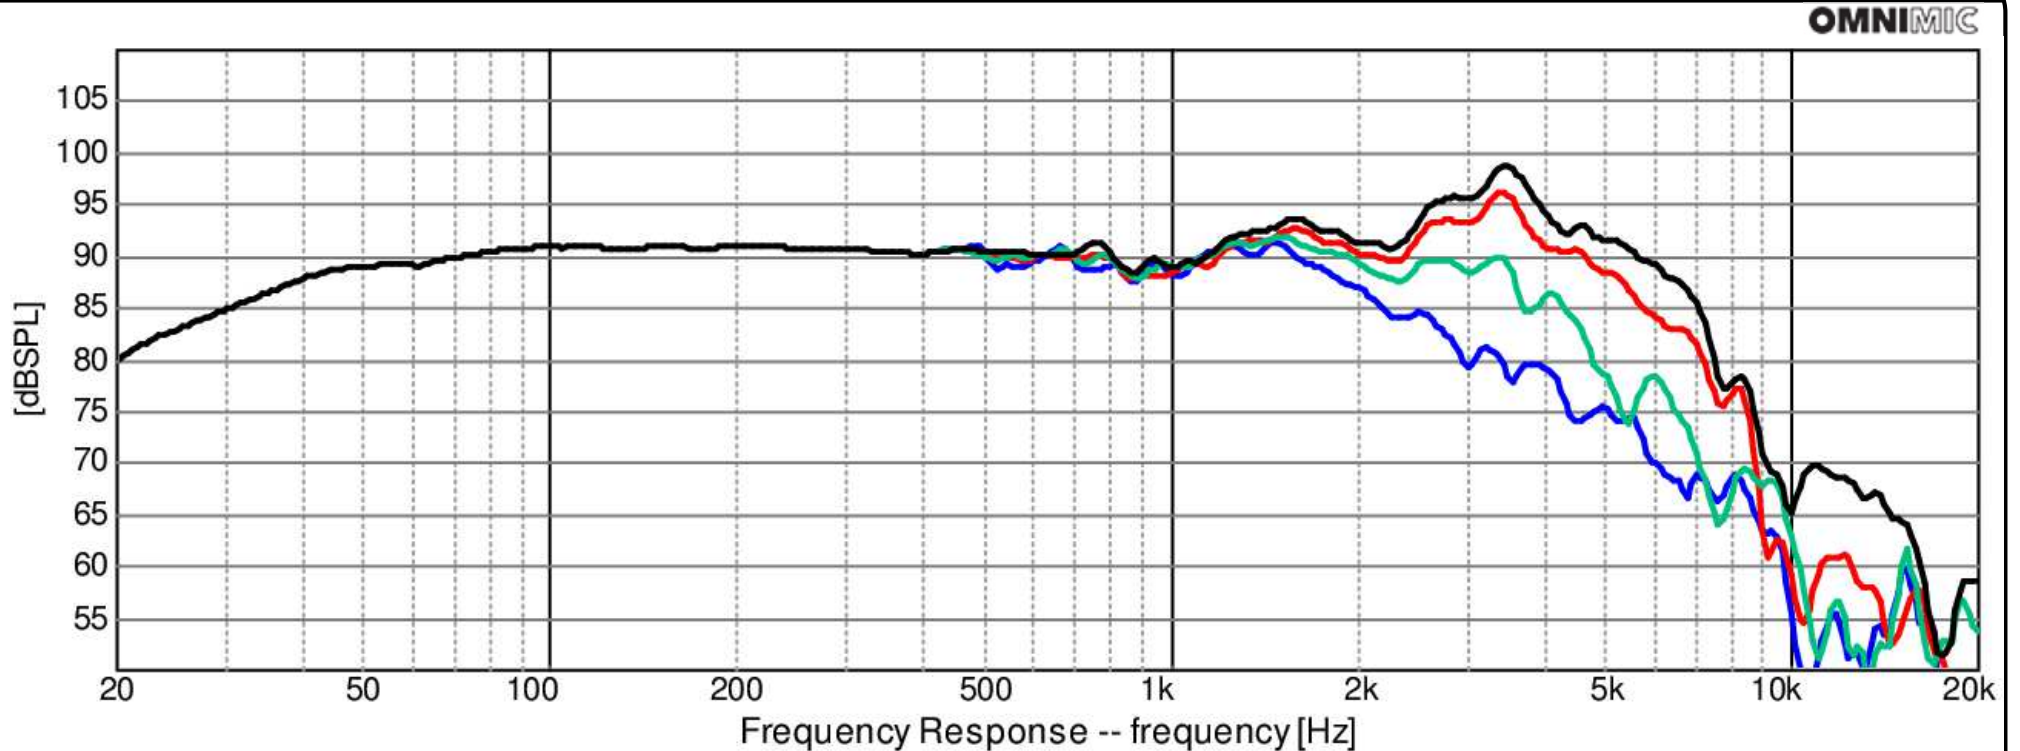

OmniMic

Note: 1/24<sup>th</sup> octave smoothing - nearfield response included in graph below 450 Hz.

Black = 0°  
Red = 15°  
Green = 30°  
Blue = 45°