



Model GW-406D


Transducer Evaluation

3/17/03

Device Under Test: GW-406D

Object of Test: Response, sensitivity and impedance

Conditions of test: Axial, 1/2 space, MIC @ 1M, 2.83Vrms pink weighted MLS

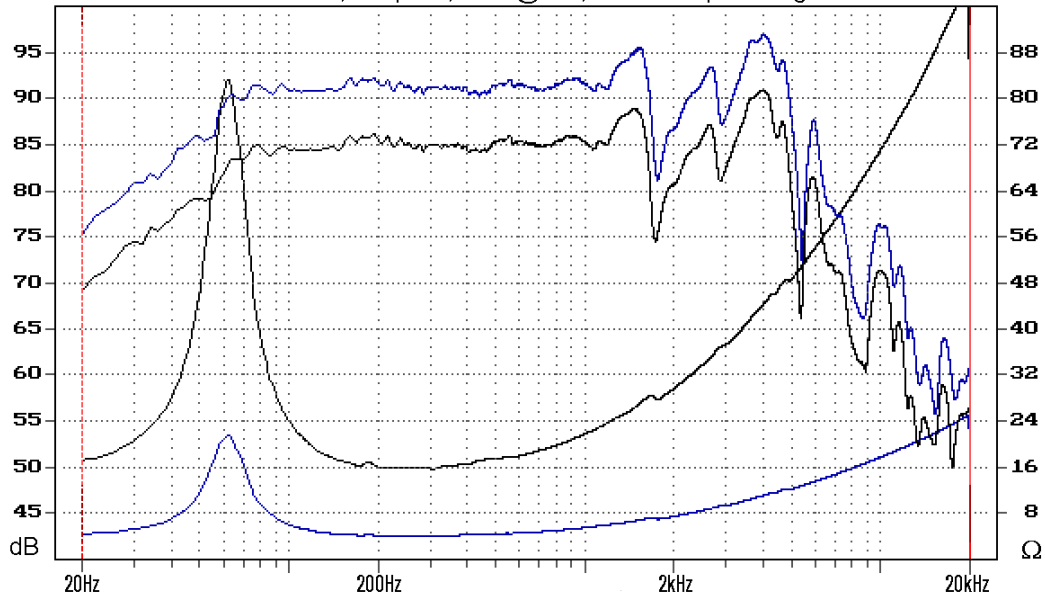

Free Air Resonance (Fs): 53Hz
Blk: Voice coils in series
Blu: Voice coils in parallel

Minimum Impedance: 15.8Ω @ 300Hz
Minimum Impedance: 4.1Ω @ 300Hz

Response resolution: 2Hz, smoothing: 0.05 octave
Impedance resolution: 1Hz, smoothing: 0.01 octave
Enclosure volume: 283L