



UW 1058

Ultimate Woofer,

Ø 10", Ø 5.1" voicecoil, 8Ω



SPECIFICATIONS

General Data

Overall Dimensions	DxH	263mmx148.5mm(10.35"x5.84")
Nominal Power Handling (DIN)	P	500W
Transient Power 10ms		1500W
Sensitivity 2.83V/1M		85.8 dB SPL
Frequency Response		See graph
Cone Material		Composite cellular fiber
Net Weight	Kg	6.1

Electrical Data

Nominal Impedance	Z	8Ω
DC Resistance	Re	6.8Ω
Voice Coil Inductance @ 1KHz	LBM	1.33mH

Voice Coil and Magnet Parameters

Voice Coil Diameter	DIA	130mm (5.1")
Voice Coil Height		37mm (1.45")
HE Magnetic Gap Height	HE	12mm (0.47")
Max. Linear Excursion	X	± 12.5mm (0.49")
Voice Coil Former		Aluminum
Voice Coil Wire		Hexatech™ Aluminum
Number Of Layers		2
Magnet System Type		High flux double ferrite vented
B Flux Density	B	0.64 T
BL Product	BXL	15.3 N.A


T-S Parameters

		Small Signal	1 V
Suspension Compliance	Cms	0.24mm/N	
Mechanical Q Factor	Qms	1.72	
Electrical Q Factor	Qes	0.58	
Total Q Factor	Qts	0.43	
Mechanical Resistance	Rms	11.691Kg/s	
Moving Mass	Mms	99.3 g	
Eq. Cas Air Load (liters)	VAS	40.8 Lt	
Resonant Frequency	Fs	26 Hz	
Effective Piston Area	SD	346 cm ²	



FEATURES

- * Uniflow™ Aluminum diecast chassis
- * High flux double Ferrite magnet system
- * 5.1" Large Hexatech™ Aluminum voice coil
- * One piece paper cone/center dome
- * Accucenter™ self centering cone assembly
- * PFS™ Progression Field Symmetry spider/surround engineering

Unit Dimensions

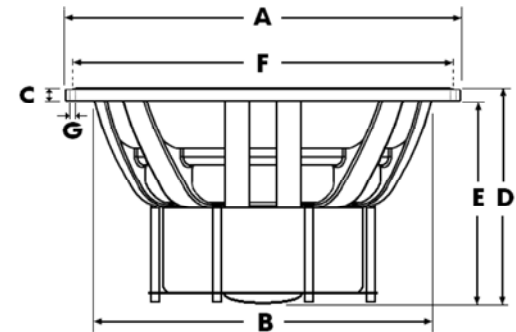

A - Overall diameter	263mm
B - Cut out diameter	241mm
C - Flange thickness	6.5mm
D - Overall height	148.5mm
E - Basket/magnet depth	142mm
F - Mounting holes location diameter	253mm
G - 6 Mounting holes, at 60° interval, inner hole diameter	Ø 5mm

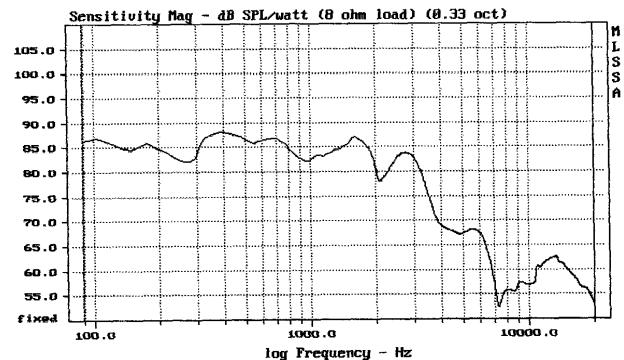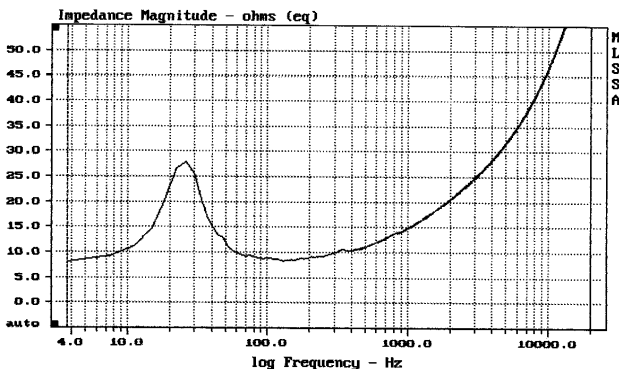

Measured on IEC baffle using Bruel & Kjaer 3144 model microphone.

Morel operate policy of continuous product design improvement, consequently specifications are subject to alteration without prior notice.