


# MDT 29 –SOFT DOME TWEETER, CLASSIC RANGE

## Acuflex Treated Dome Ferrite Magnet



### FEATURES:

- Large diameter voice coil
- Replaceable dome/coil assembly
- Aluminum face plate
- Ferrofluid cooled
- High power handling
- Sturdy gold-plated nput tags

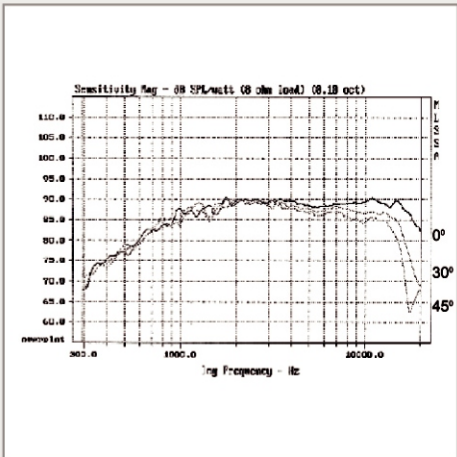

### Specifications

Overall Dimensions		Ø94mm(3.7")x28.6mm(1.1")
Nominal Power Handling (DN)	P	80 W
Transient power 10ms		1000 W
Nominal Impedance	Z	8 Ohms
Sensitivity 1W/1M		89 dB
Frequency Response		1800-20000 Hz
Resonant Frequency	FS	900 Hz

### Voice coil

Voice Coil Diameter	DIA	28mm (1.125")
Voice Coil Height		2.5mm (0.098")
Voice Coil Former		Aluminum
Voice Coil Wire		Copper
Number of Layers		2
DC Resistance	RE	5.2 Ohms
Voice Coil Inductance @ 1KHz	LBM	0.05 mH

### Magnet System

Magnet System Type		Ferrite
HE - Magnetic Gap Height	HE	2.5mm (0.098")
B Flux Density	B	1.45 T
BL Product	BXL	3.3 N.A
Max. Linear Excursion	X	

### Operational Parameters

Suspension Compliance	CMS	
Mechanical Q Factor	QMS	
Electrical Q Factor	QES	
Total Q Factor	Q/T	
Mechanical Resistance	RMS	
Moving Mass	MMS	0.5 gm.
Eq. Cas Air Load (liters)	VAS	
Dome Material	Acuflex	Hand Treated Fabric
Effective Piston Area	SD	6.0 cm <sup>2</sup>
Net Weight	Kg.	0.54 Kg.

# MDT 29

