




GW-1558

Transducer Evaluation

Device Under Test: Goldwood GW-1558 15" MI Driver

Object Of Test: Response and impedance

Conditions of test: Axial, 1/2 space, MIC @ 1M, 2.83Vrms pink weighted noise

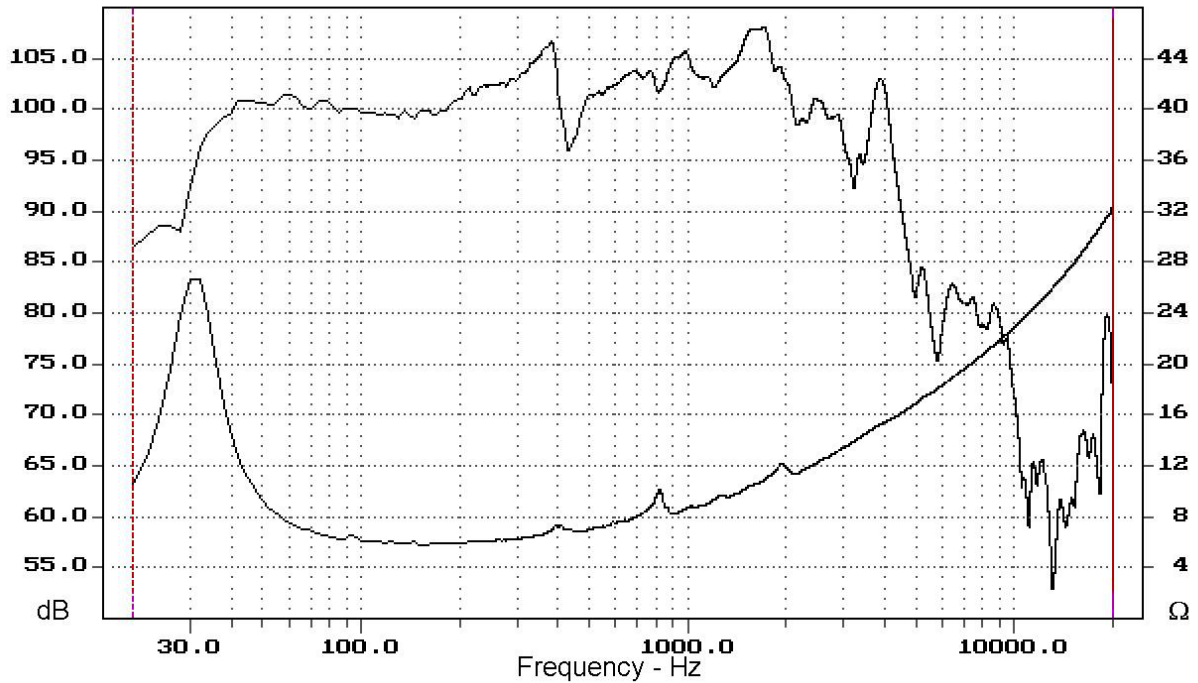

Fs: 30Hz, Z-min: 6.0Ω @ 180Hz

Measurement resolution: 2Hz
Display smoothing: 0.05 octave
Enclosure volume: 283L