goldwood

GW-1038PA

Transducer Evaluation

3/17/03

Device Under Test: GW-1038P/A

Object of Test: Response, sensitivity and impedance

Conditions of test: Axial, ½ space, MIC @ 1M, 2.83Vrms pink weighted MLS

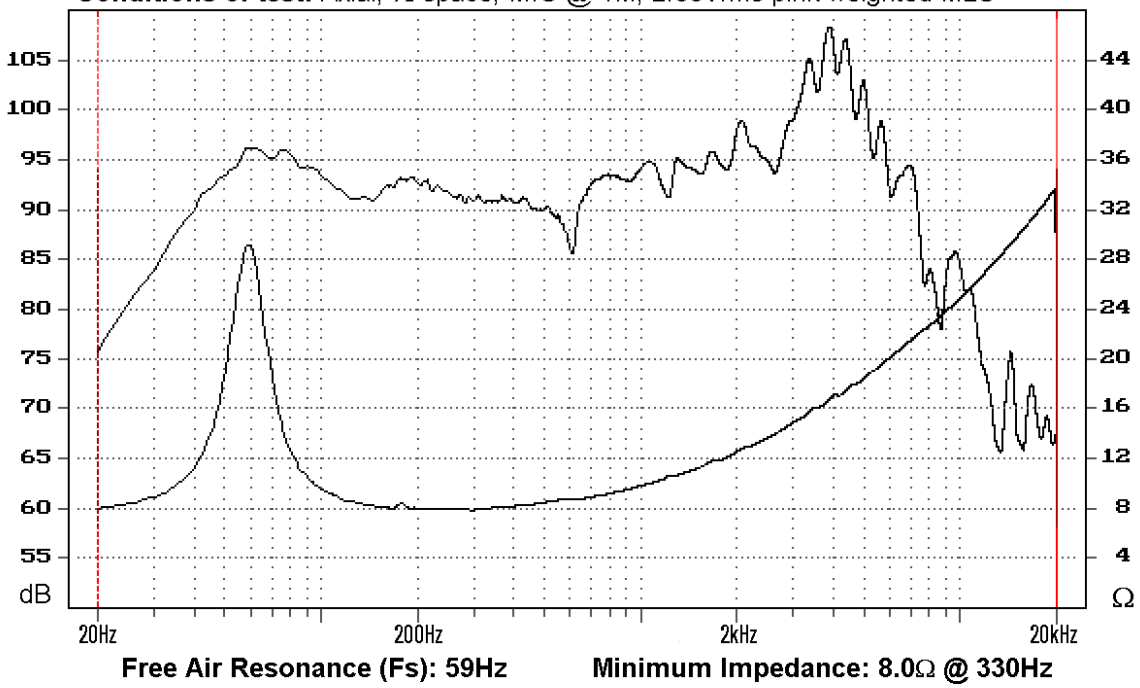

Free Air Resonance (Fs): 59Hz

Minimum Impedance: 8.0Ω @ 330Hz

Response resolution: 2Hz, smoothing: 0.05 octave
Impedance resolution: 1Hz, smoothing: 0.01 octave
Enclosure volume: 283L